

SPLAYED CONFIGURATION | ALUMINUM

SPECIFICATIONS

Overview




- Provides outstanding cooling power and low pressure drop
- Omnidirectional
- Recommended airspeed range: 0 to 600 LFM (0 to 3 m/s)
- RoHS compliant

Technical

- Material: Pure Aluminum
- Mfg. process: Cold forging
- Plating options: Black/clear anodize, chemical conversion coating
- Base finish: Lapped
Flatness: Better than 0.001 in/in
Surface roughness: 16 RMS

Attachment Methods

- Mechanical clips (straight & diagonal)
- Double sided thermal tape
- Attachment tabs
- Push pins
- Holes & threads

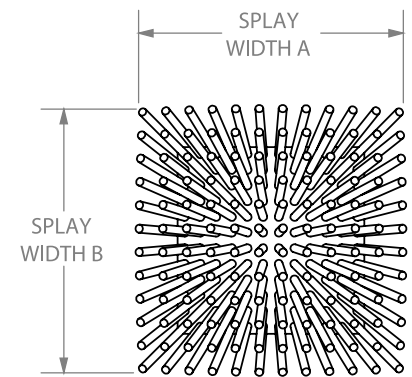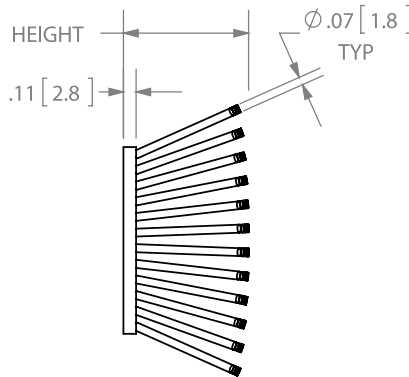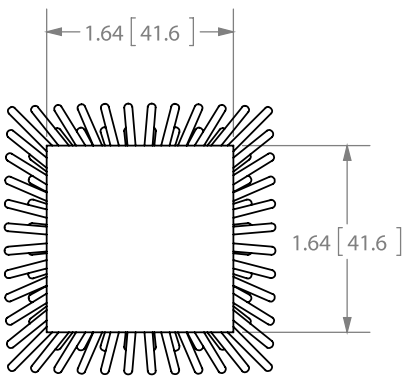

A FLEXIBLE APPROACH: Parts can easily be modified to fit any application

P/N	Top (A) in(mm)	Top (B) in(mm)	Height in(mm)	Weight lb(g)	Thermal Resistance in °C/W			
					100(.5)*	200(1)	400(2)	600(3)
3-161603P	1.73(44.0)	1.73(44.0)	0.30(7.6)	0.039(18)	8.19	5.27	3.10	2.22
3-161604P	1.81(46.0)	1.81(46.0)	0.40(10.2)	0.044(20)	5.89	3.65	2.11	1.50
3-161605P	1.89(48.1)	1.89(48.1)	0.50(12.7)	0.050(23)	4.56	2.78	1.59	1.14
3-161606P	1.98(50.2)	1.98(50.2)	0.60(15.2)	0.055(25)	3.69	2.22	1.28	0.91
3-161607P	2.06(52.2)	2.06(52.2)	0.70(17.8)	0.061(27)	3.07	1.84	1.06	0.77
3-161608P	2.14(54.3)	2.14(54.3)	0.80(20.3)	0.066(30)	2.61	1.56	0.90	0.66
3-161609P	2.22(56.4)	2.22(56.4)	0.90(22.9)	0.071(32)	2.25	1.34	0.79	0.58
3-161610P	2.30(58.4)	2.30(58.4)	1.00(25.4)	0.077(35)	1.96	1.17	0.69	0.51
3-161611P	2.38(60.5)	2.38(60.5)	1.10(27.9)	0.082(37)	1.73	1.04	0.62	0.46