

SPLAYED CONFIGURATION | ALUMINUM

SPECIFICATIONS

Overview


- Provides outstanding cooling power and low pressure drop
- Omnidirectional
- Recommended airspeed range: 0 to 600 LFM (0 to 3 m/s)
- RoHS compliant

Technical

- Material: Pure Aluminum
- Mfg. process: Cold forging
- Plating options: Black/clear anodize, chemical conversion coating
- Base finish: Lapped
Flatness: Better than 0.001 in/in
Surface roughness: 16 RMS

Attachment Methods

- Mechanical clips (straight & diagonal)
- Double sided thermal tape
- Attachment tabs
- Push pins
- Holes & threads

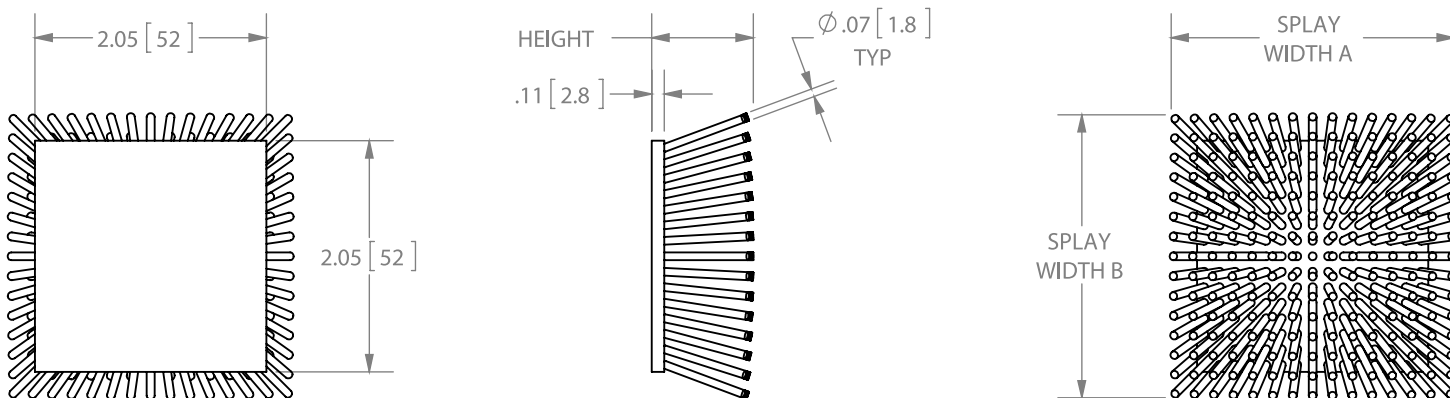

A FLEXIBLE APPROACH: Parts can easily be modified to fit any application

P/N	Top (A) in(mm)	Top (B) in(mm)	Height in(mm)	Weight lb(g)	Thermal Resistance in °C/W			
					100(.5)*	200(1)	400(2)	600(3)
3-202003P	2.14(54.4)	2.14(54.4)	0.30(7.6)	0.061(28)	6.11	3.79	2.17	1.53
3-202004P	2.22(56.5)	2.22(56.5)	0.40(10.2)	0.069(32)	4.34	2.60	1.46	1.03
3-202005P	2.31(58.6)	2.31(58.6)	0.50(12.7)	0.078(35)	3.33	1.96	1.10	0.78
3-202006P	2.39(60.6)	2.39(60.6)	0.60(15.2)	0.086(39)	2.67	1.56	0.88	0.63
3-202007P	2.47(62.7)	2.47(62.7)	0.70(17.8)	0.095(43)	2.21	1.29	0.73	0.52
3-202008P	2.55(64.8)	2.55(64.8)	0.80(20.3)	0.10(47)	1.87	1.09	0.62	0.45
3-202009P	2.63(66.8)	2.63(66.8)	0.90(22.9)	0.11(51)	1.60	0.93	0.54	0.39
3-202010P	2.71(68.9)	2.71(68.9)	1.00(25.4)	0.12(54)	1.39	0.81	0.47	0.35
3-202011P	2.79(71.0)	2.79(71.0)	1.10(27.9)	0.13(58)	1.22	0.72	0.42	0.31

Disclaimer: www.coolinnovations.com

*Air Speed in LFM (m/s)